




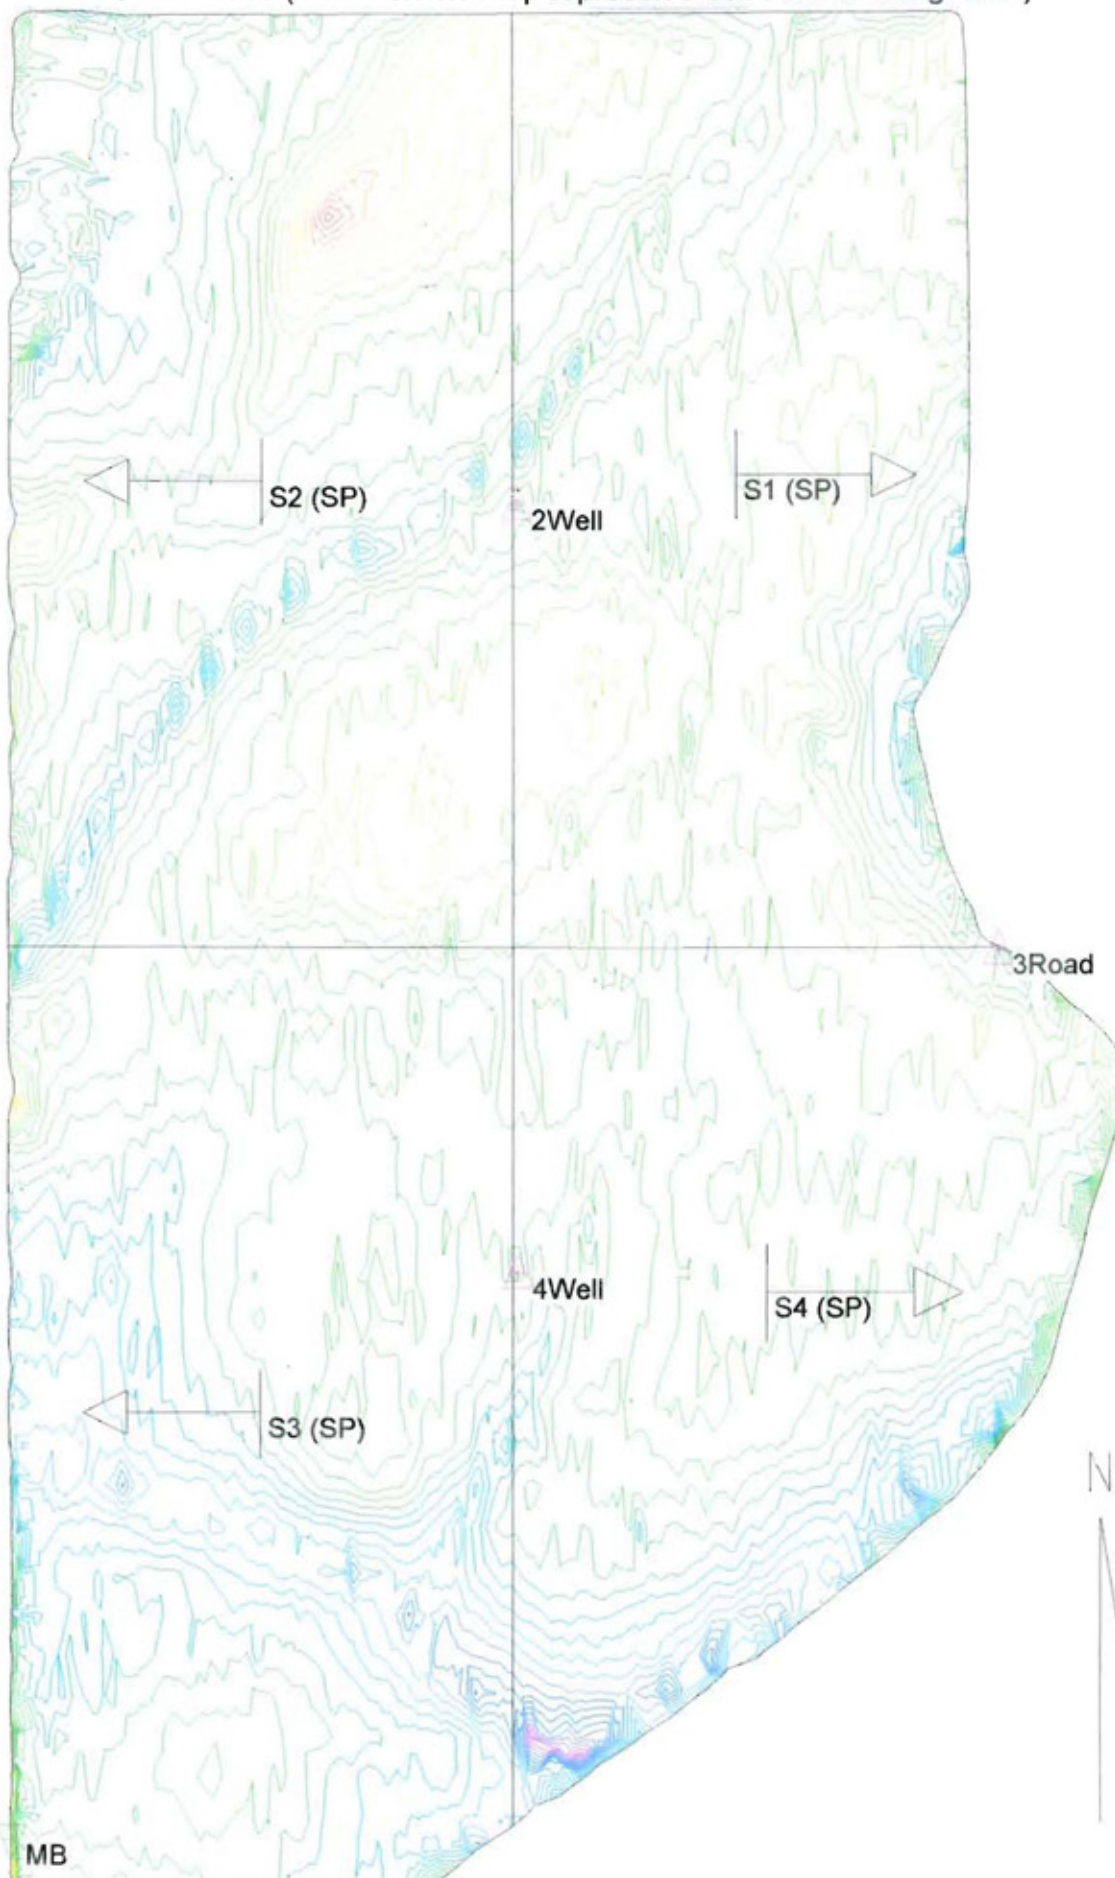

Precision leveled as designed in 2011

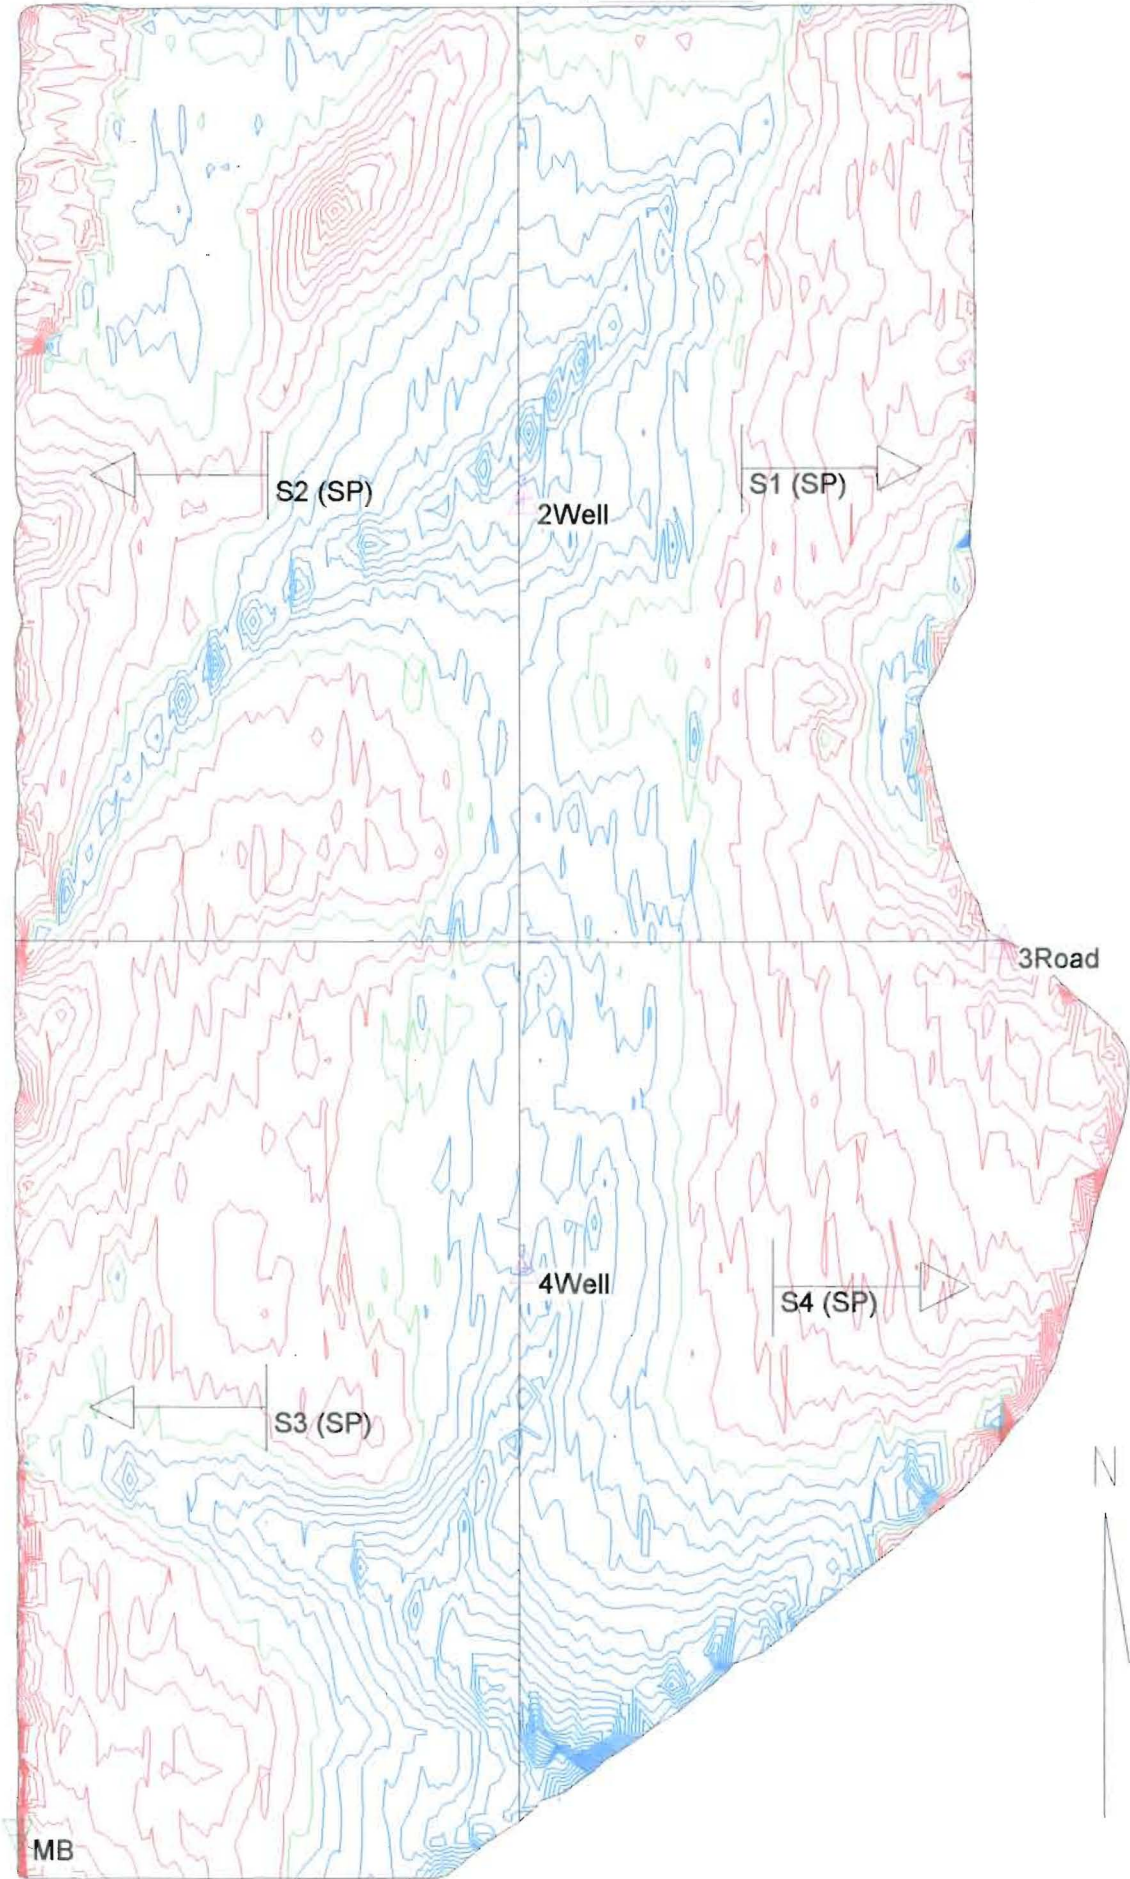

0
0.8
0.6
0.4
0.2
0
0.8
0.6
0.4
0.2
0
0.8
0.6
0.4
0.2
0

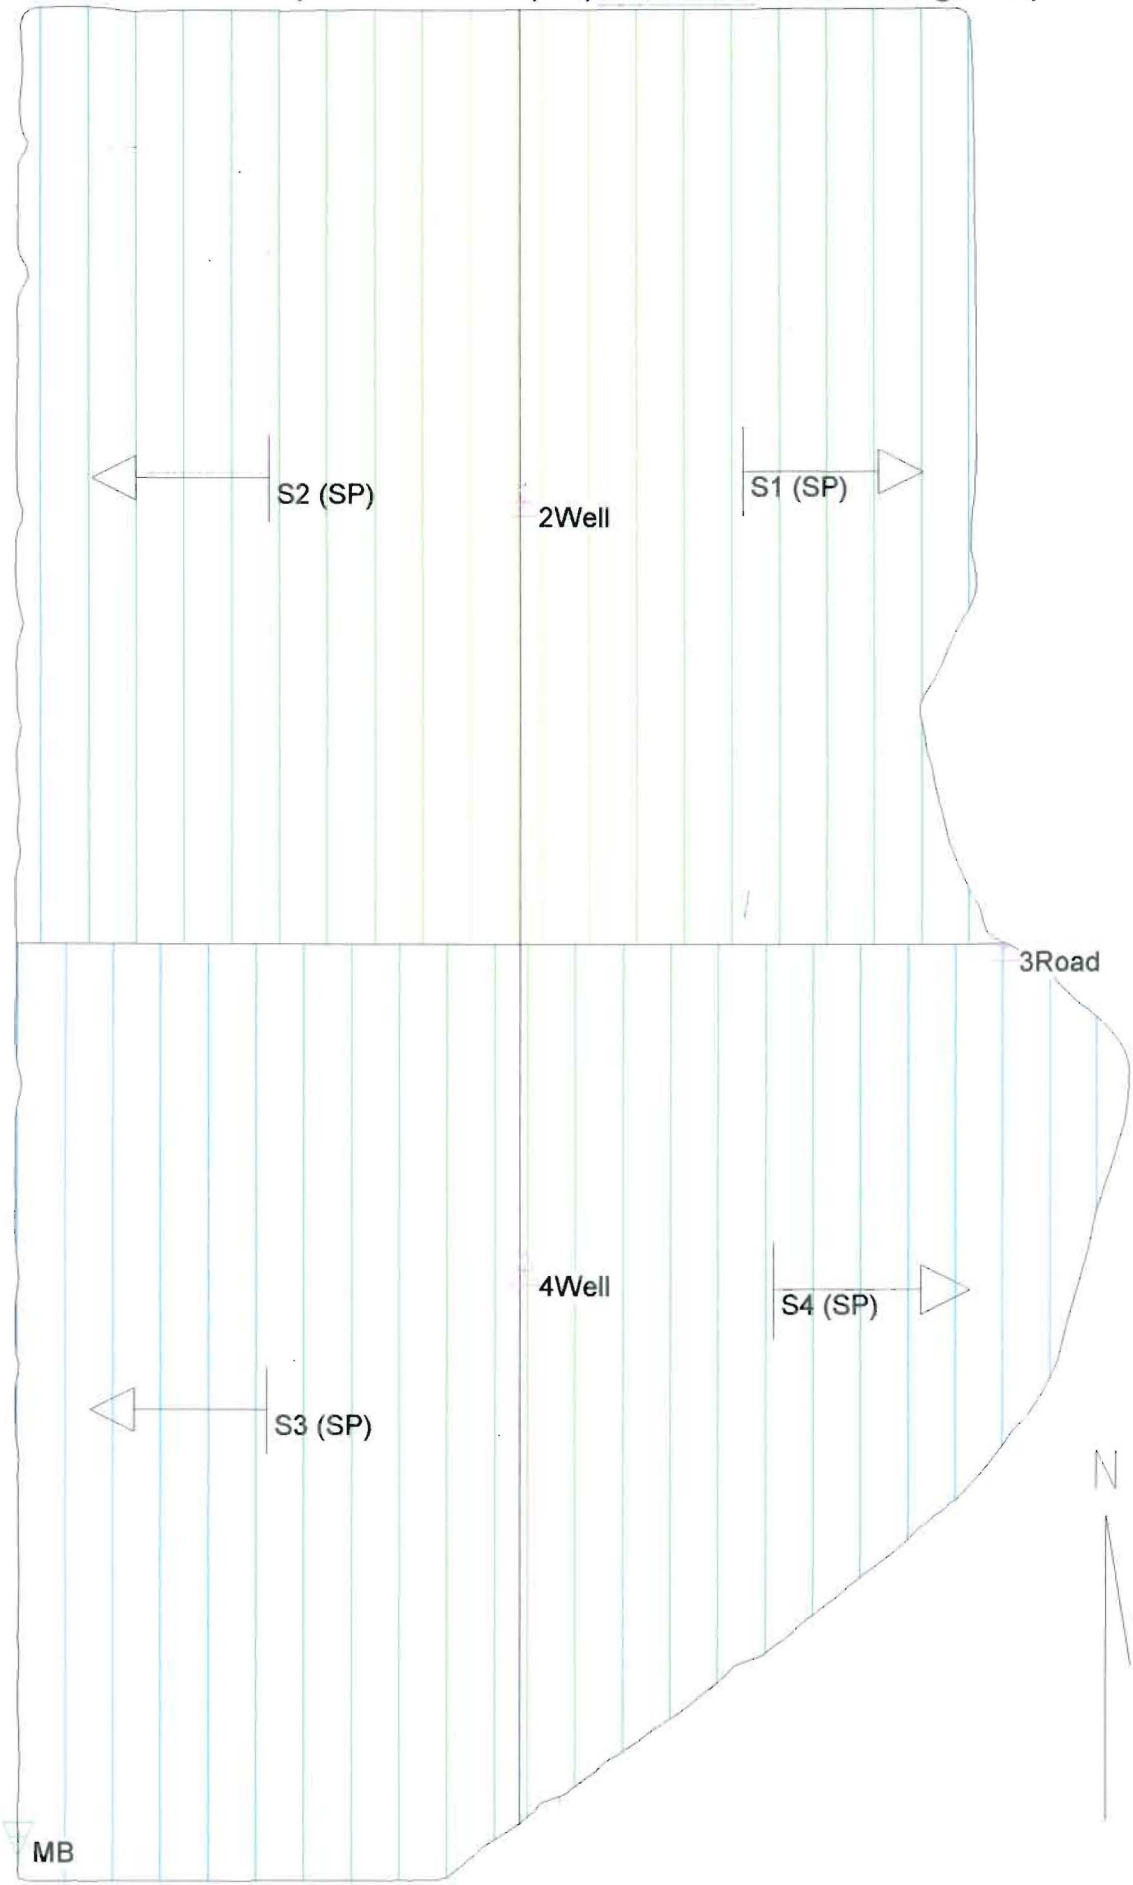

Project: Field #38

Customer: Topango

Location: Skene, Ms.

Survey Date: 10/23/10

Grid Spacing = 100 Feet

Benchmarks

Master: (0, 0, 10.00) - off field

2Well: (1413, 3745, 9.06) - 1.01 Fill

3Road: (2761, 2498, 8.97) - 1.38 Cut

4Well: (1415, 1589, 9.22) - 0.39 Fill

Entire Field

312.01 Acres

CF Ratio: 1.20

Cut/Fill

175422/119954 cy

1.93/2.29 max ft

562.24 cy/acre

Import: 0 cy

Export: 26238 cy

Section 1 Data

75.18 Acres

CF Ratio: 1.20

Cut/Fill

37512/22478 cy

1.93/2.29 max ft

498.97 cy/acre

Import: 0 cy

Export: 8779 cy

0.150 % →N 90.0 CW

0.000 % ↓S 0.0 CCW

0.150 % →N 90.0 CW

Section 2 Data

84.17 Acres

CF Ratio: 1.20

Cut/Fill

33567/21778 cy

2.39/2.02 max ft

398.82 cy/acre

Import: 0 cy

Export: 6193 cy

0.150 % <N 90.0 CCW

0.000 % ↑N 0.0 CW

0.150 % <N 90.0 CCW

Section 3 Data

84.08 Acres

CF Ratio: 1.20

Cut/Fill

46352/33610 cy

3.66/2.79 max ft

551.26 cy/acre

Import: 0 cy

Export: 5034 cy

0.150 % $\triangleleft$ N 90.0 CCW

0.000 % $\uparrow$ N 0.0 CW

0.150 % $\triangleleft$ N 90.0 CCW

Section 4 Data

68.58 Acres

CF Ratio: 1.20

Cut/Fill

57990/42088 cy

2.99/4.18 max ft

845.60 cy/acre

Import: 0 cy

Export: 6232 cy

0.150 % $\rightarrow$ N 90.0 CW

0.000 % $\downarrow$ S 0.0 CCW

0.150 % $\rightarrow$ N 90.0 CW