



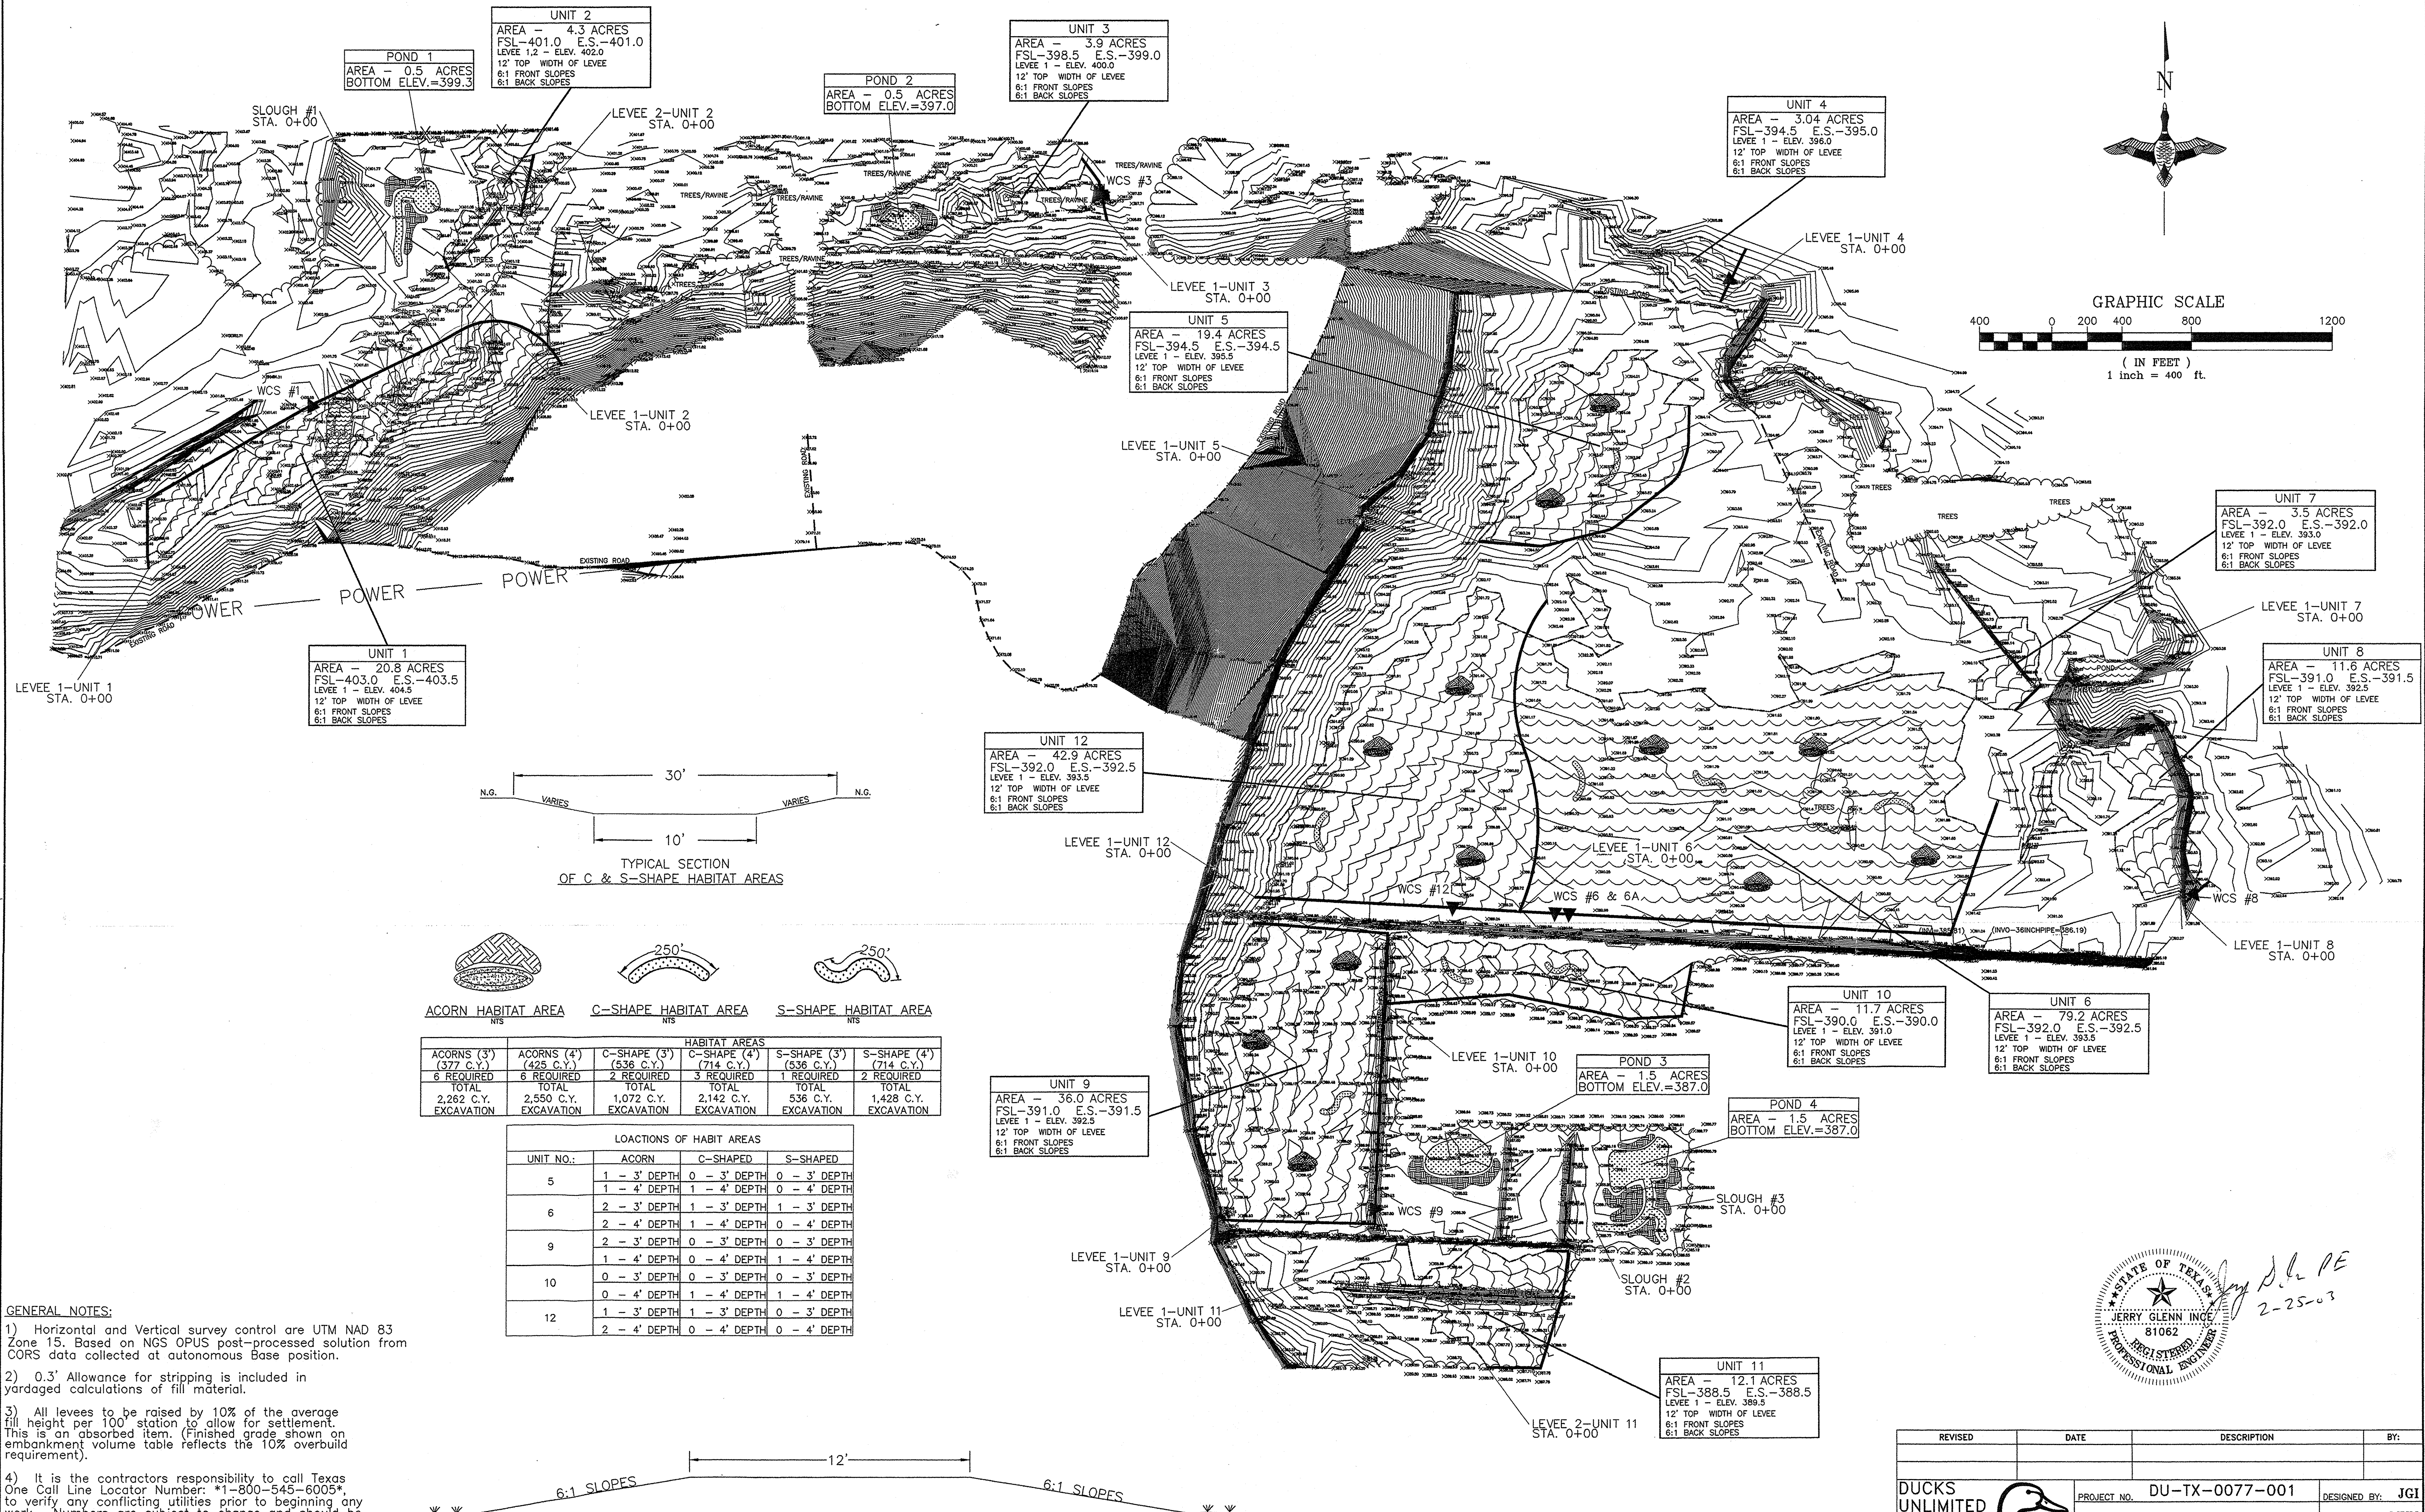

GENERAL NOTES:

- Horizontal and Vertical survey control are UTM NAD 83 Zone 15. Based on NGS OPUS post-processed solution from CORS data collected at autonomous Base position.
- 0.3' Allowance for stripping is included in yardaged calculations of fill material.
- All levees to be raised by 10% of the average fill height per 100' station to allow for settlement. This is an absorbed item. (Finished grade shown on embankment volume table reflects the 10% overbuild requirement).
- It is the contractors responsibility to call Texas One Call Line Locator Number: *1-800-545-6005*, to verify any conflicting utilities prior to beginning any work. Numbers are subject to change and should be checked by contacting local telephone company.
- The engineer preparing these plans will not be responsible for, or liable for, unauthorized changes to or uses of these plans. All changes to the plans must be in writing and must be approved by the preparer of these plans.

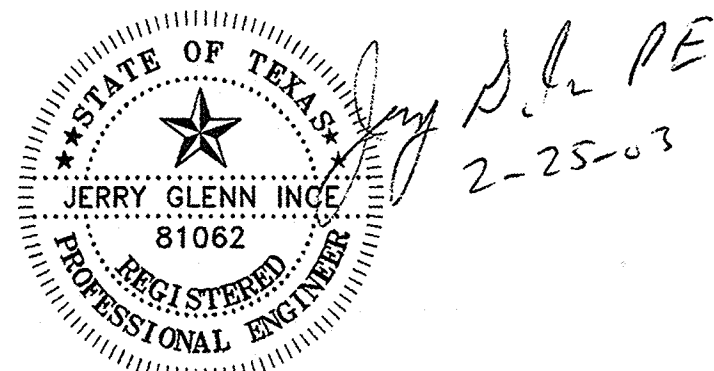

REVISED	DATE	DESCRIPTION	BY:
DUCKS UNLIMITED INC.		PROJECT NO. DU-TX-0077-001	DESIGNED BY: JGI
SOUTHERN REGIONAL OFFICE 193 Business Park Drive, Suite E Ridgeland, MS 39157 Certificate of Authorization No. F-001112		RIVERVIEW FARMS CONTOUR & DESIGN MAP	DRAWN BY: MKN
DATE: 2/03		SHEET NO.: 6 OF 9	CHECKED BY: CWR
		CONTRACT #	APPROVED BY: JGI