


## Tile Map Guide

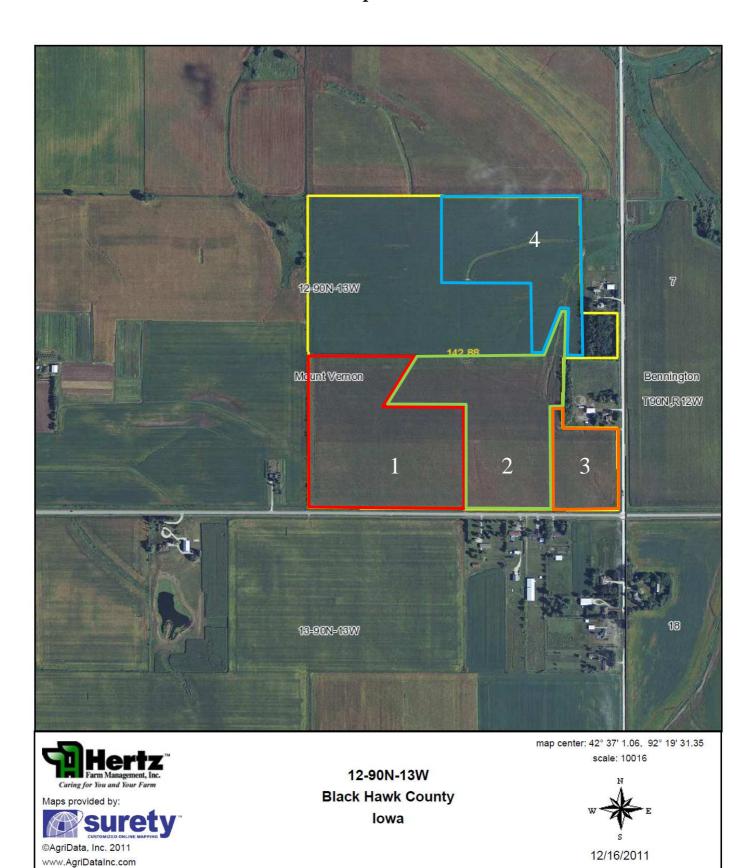


## Aerial Photo Showing Tile Lines For Area #1

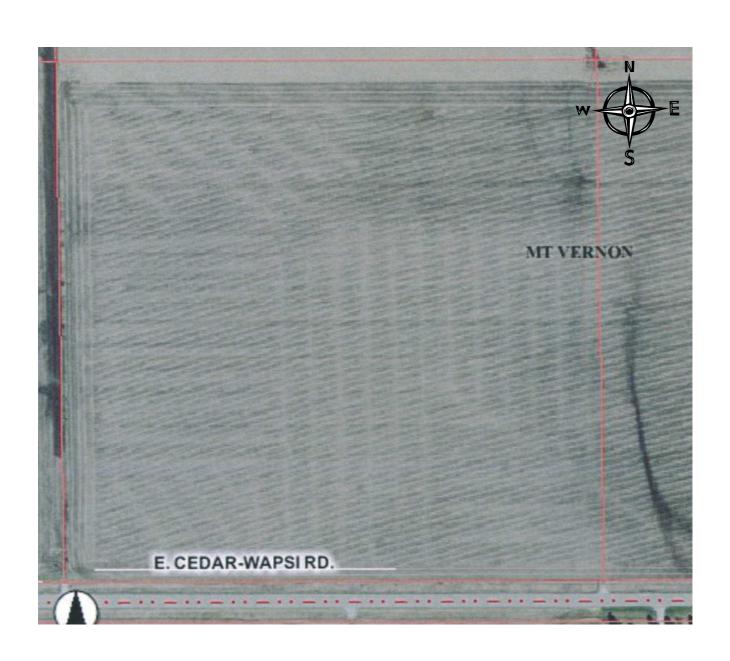

Tile Map For Area #2

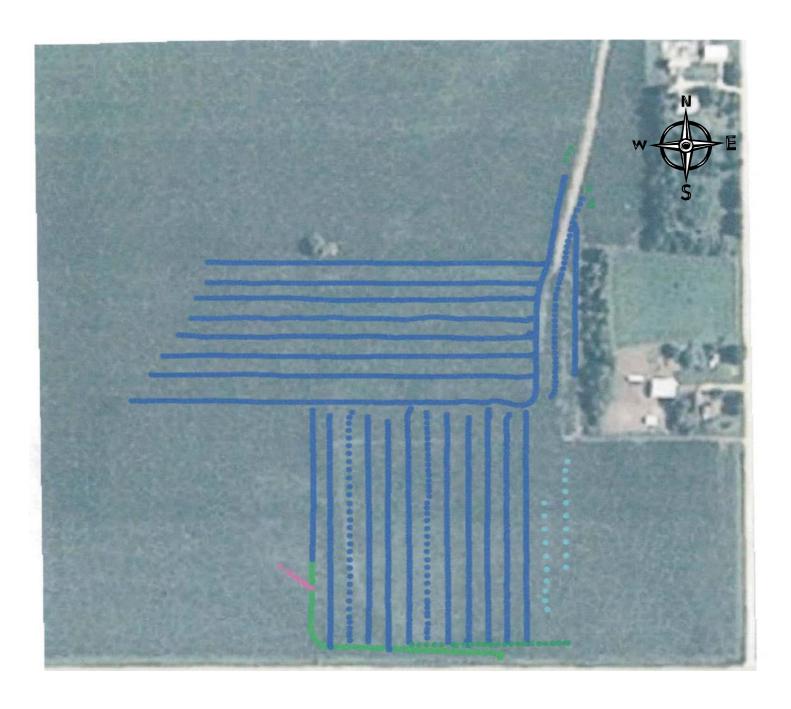

Tile Map For Area #3

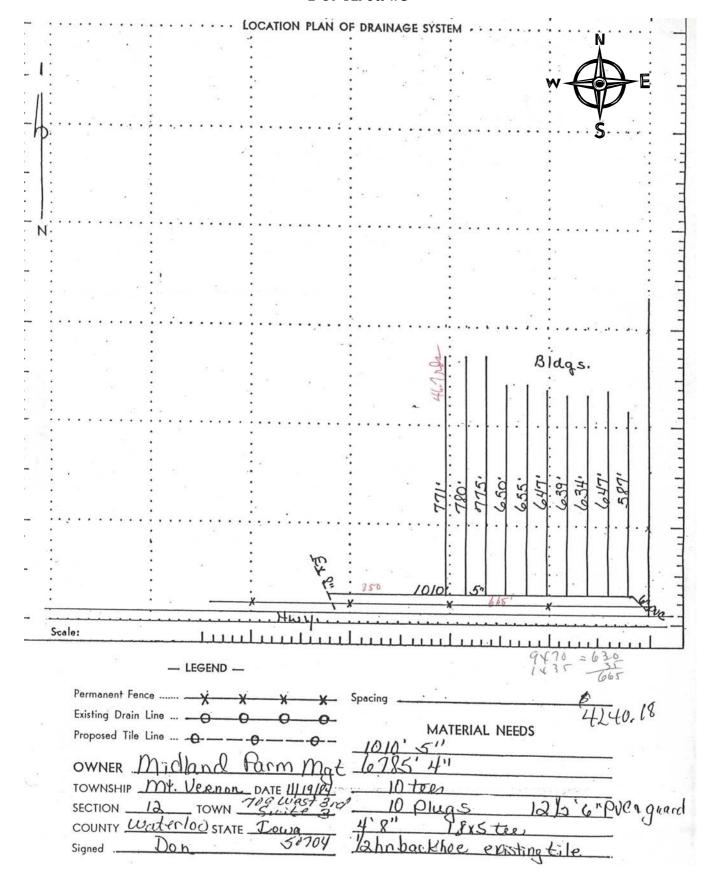

Tile Map For Area #4

| SPECIFICATIONS | 1. Tile shall meet ASTM specifications. 2. Design based on ASTM in./24 hrs. 3. Min. depth of tile to be ASTM. 5. Min. grade of laterals Code Astminiary of laterals Code Astminiary of laterals Code Astminiary of laterals Code Astminiary of All connections for joining 2 lines must be sealed with mortar unless manufactured connections are used. 8. Tile shall be blinded by covering to a depth of 6" with loose mellow top soil. All tile laid must be blinded by end of days work.  Materials: 7463. 5.77/LE  | CONSTRI         | 10/18/63-<br>Date | *  | U. S. DEPARTMENT OF AGRICULTURE SOIL CONSERVATION SERVICE,  Other Market 100 100 100 100 100 100 100 100 100 10 |
|----------------|---|-----------------|-------------------|----|---|
|                | CAPT 55 55MM 40 AC WETANGE  | ,               |                   | _M | Proposed Deep Ditch   |
|                | 19.0 807<br>25.11.0 809<br>15.11.0 |                 |                   |    | ILLULILLILLILLILLILLILLILLILLILLILLILLIL  |
|                |   | 2               | S S               | *  | 40 reet Prop  |
|                |   | المتنابينالينيا | ×x                |    | Scale   Seals 4  Scale   Seals 4  Farm Boundary  Permanent Fence  Existing Tile Line                            |