


SURVEYOR'S CERTIFICATE

NORTH-SOUTH 1/4 LINE
33rd STREET

SOUTH
1572.63'

NORTH 1/4 CORNER
SECTION 26, T4S, R10W
FD STD MONUMENT PER
LIBER 2, PAGE 345

CENTER 1/4 CORNER
SECTION 26, T4S, R10W
IRON REMOVED FOR CONSTRUCTION
N 45° W FNC COR 43.2'
S 45° W TELE POLE 42.8'
S 20° E 31" MAPLE 68.0' TO FACE

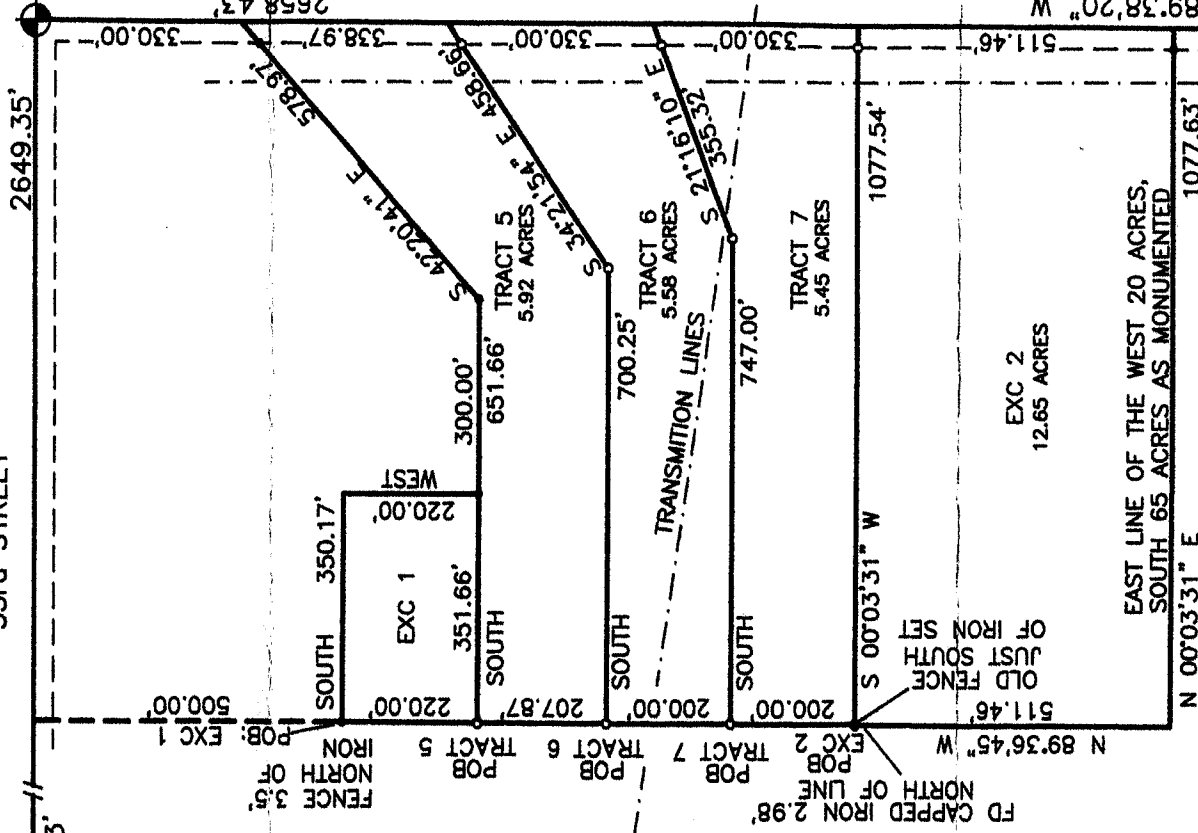

WEST 1/4 CORNER
SECTION 26, T4S, R10W
FD 1/2" REBAR IN BOX
S 45° W I-BEAM 43.5'
N30° E I-BEAM 54'
S30° E PHONE PED 35.5'
C/L 32nd ST. 1' WEST

POWER LINES



I HEREBY CERTIFY THAT I HAVE SURVEYED AND MAPPED THE ABOVE PLATTED AND/OR DESCRIBED ON THIS DATE, AND THAT THE RATIO OF CLOSURE IN THE UNADJUSTED FIELD OBSERVATIONS WAS 1-10000 FEET ±, AND THAT ALL REQUIREMENTS OF SECTION 3 OF P.A. 132, 1970 HAVE BEEN COMPLIED WITH.

BY: *Mark S. Evans* PS DATE: 8-20-09

MARK S. EVANS, PS MI# 45497

LEGEND:

○ - SET 1/2" IRONS
● - CORNER FOUND

R - "RECORDED AS"
△ - LATHE

SECTION 26, T-4-S, R-10-W

BRADY TWP, KALAMAZOO CO.



CERTIFIED TO: HUGHEY REALTY

BEARING SOURCE: PREVIOUS SURVEY

JOB NO.: 09-056 DATE: 8-20-09

SHEET 1 OF 3

SCALE: 1" = 300'



EVANS LAND SURVEYING

GOBLES, MICH. 49055

(269) 377-2904 FAX: (269) 628-4964