
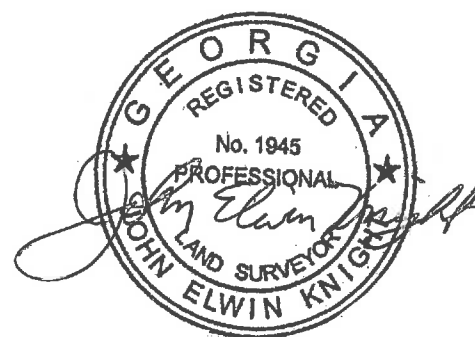


1. The field data upon which this survey is based has a closure precision of One foot in 35,120 feet and an angular error of 2 seconds per angle point and was not adjusted.
2. The precision of the plat closure exceeds one foot in 40,000 feet.
3. The equipment used to prepare this survey was a Topcon 211D total station and Leitz set 3.
4. Pin size, location, and found or set status from our former surveys.

Knight Surveying, Inc.
John Elwin Knight,
Ga.R.S.L. 1945
P.O. Box 625
Social Circle, Ga. 30025
Ph: 770-464-4549

LINE	BEARING	DISTANCE
L1	S87°46'21"E	85.59'
L2	S87°39'38"E	121.54'
L3	S88°07'15"E	124.95'
L4	N88°29'36"E	90.11'
L5	N69°35'01"E	43.72'
L6	N39°38'16"E	33.22'
L7	N26°28'52"E	83.57'
L8	N37°55'38"E	48.09'
L9	N81°38'51"E	63.86'
L10	S79°06'15"E	86.34'
L11	S86°10'22"E	257.69'
L12	S76°08'13"E	117.32'
L13	S83°22'48"E	82.55'
L14	N85°15'35"E	80.06'

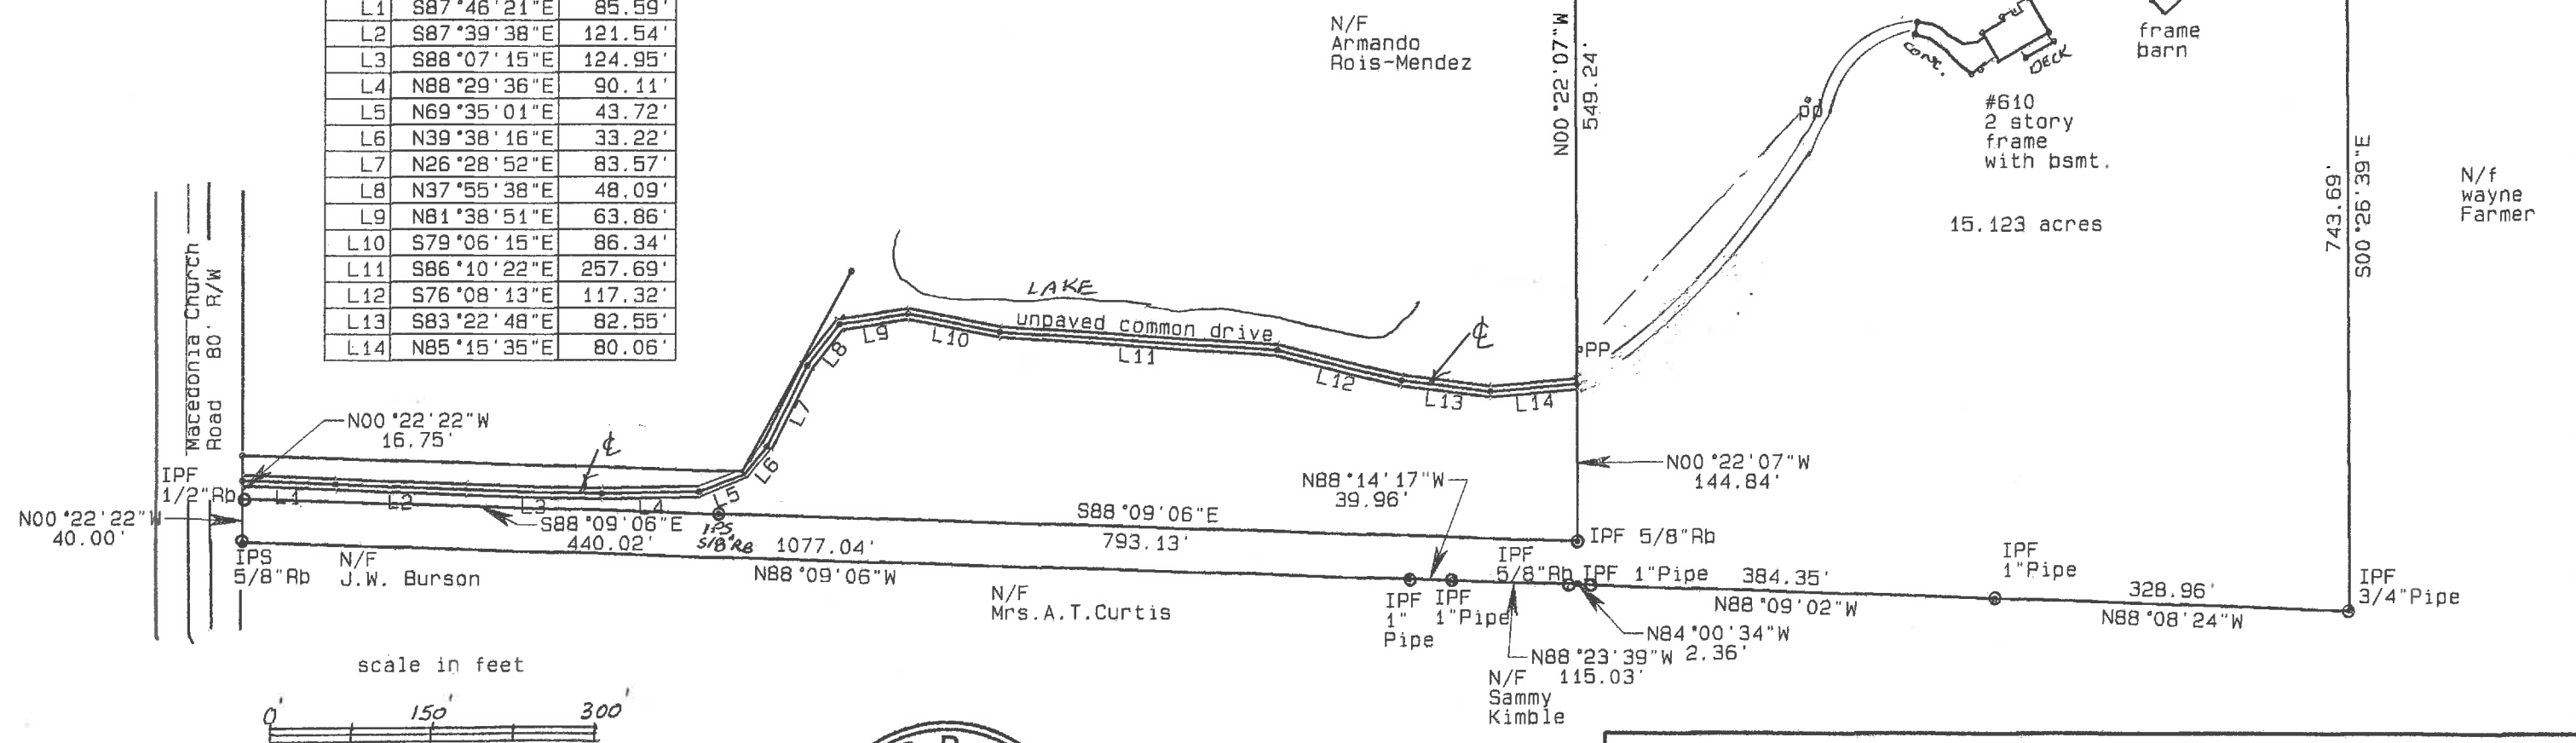

Plat of Survey for: John B. Stamps	
Scale: 1"=150	Land District 9 Land Lot 358
Date: 8/26/2009	Newton County, Georgia
Revised:	Drawn By: jek
Job: 082609	Surveyor: John Elwin Knight, Ga.R.L.S. 1945