


BOTTOM BAR LOCK			
TYPE	OPERATION		
	IN	OUT	BOTH
SLIDE BOLT	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
INTERLOCK	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

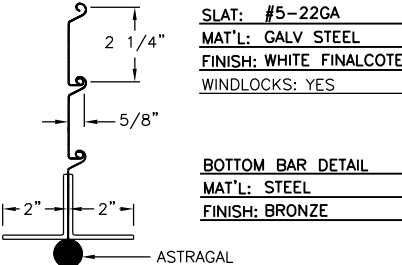

- NOTES:
- 01. GENERAL SPECIFICATIONS SEE SHEET 1.
 - 02. APPROX. WT. OF DOOR IS 1,438 LBS.
 - 03. DOOR DESIGNED TO WITHSTAND 20 PSF WINDLOAD.
 - 04. THIS DRAWING COVERS GENERAL CONDITIONS, DIMS, AND SPECIFICATIONS ONLY. DO NOT USE FOR INSTALLATION PURPOSES, INSTALLATION INSTRUCTIONS AND DIMENSIONS ARE INCLUDED WITH SHIPMENT.
 - 05. PROVIDE ADEQUATE CLEARANCE FOR WIRING MOTOR.
 - 06. DOOR DESIGNED FOR 25 CYCLES PER DAY.

DIMENSIONS AND CLEARANCES AS NOTED BY ASTERISK (*) MUST BE FIELD CHECKED.

VERIFIED BY: _____ ON: _____

MAKE	HAND	ARCH. MARK	DOOR MARK
1	AS SHOWN	.	R1
	OPPOSITE		

3			
2			
1			
	ACCESS	9APR2015	ORIGINAL DRAWING
NO.	BY	DATE	REVISION



JOB: DENVER 1504090041
CONTRACTOR:
ARCHITECT:
DISTRIBUTOR: AMARR - DENVER

DRAWING NO. 1504090041 1 OF 1

SERVICE DOOR || VERT MNT GH OPER || FACEMTD

DocuSigned by:
Ravin Lerman
7F9AD3CAAB1946D...