

## Harrell's Waterproofing, Inc.

Greg Harrell, President  
7103 US 158  
Stokesdale, North Carolina 27357

Office (336) 643-6969  
Fax (336) 643-8769  
Cell (336) 382-0778  
email: harrells@triad.rr.com

Contract 5/1/2016

Wilber French  
Job Reference: 267 QuaQua Creek Road in Ruffin, N.C.

### Basement Waterproofing

- Remove porch/steps and replace
  - Remove shrubs
  - Remove gutter drain system and replace
  - Remove a section of the sidewalk and replace
  - Remove a section of the driveway section and replace
  - Excavate front and left side elevations beside the basement foundation walls to the footing
  - Pressure wash the basement foundation walls
  - Waterproof the basement foundation walls with Mar-Flex waterproofing system
  - Install 4" French drain and # 57 washed stone
  - Backfill to the original grade
  - Install 4" solid PVC pipe drain exits to the left rear of the property
- \*Note- Steel beams that will support the basement walls and exterior crack repair will be priced when the engineer's report is complete.

Total Contract Price \$19,865.00  
50% Due Upon Start of Project \$9,932.50  
Balance Due Upon Completion of job \$9,932.50

I agree to pay these terms for the work done on this project.

Wilber French X Wilber French Date 5/2/16

Harrell's Waterproofing, Inc. X [Signature] Date 5/2/16

**Your Dry Choice Since 1988!!**

*Pd CR 4422 5/2/16 (50%)*  
*Pd check 001 (Carter Bank) 6-2-16 (Final 50%)*



Joshua B. Rose, PE, PLLC  
5308 Summerwood Drive  
Greensboro, NC 27455

# Invoice

Date	Invoice #
5/1/2016	1963

Bill To
Wilbur French 267 Quaqua Creek Road Ruffin, NC 27326

ck-4430

	P.O. No.	Terms	Project	
		Due on receipt		
Description		Qty	Rate	Amount
Visual, non-invasive, "as is" structural observation: Cracking of front basement wall; cracking of brick veneer			300.00	300.00
Letter			0.00	0.00
Sketch(es)			0.00	0.00


Please include invoice number on check made payable to Joshua B. Rose, PE, PLLC

- wall of the front porch are a result of the wall having insufficient flexural strength to resist the lateral loads imposed by the full height earthen backfill and any trapped water as evidenced by the efflorescence on the interior of the wall.
- 2) It is also my opinion that the cracking of the brick veneer at the left front corner of the home is a result of slight settlement of the left front corner of the home.

Burlington nc? Gary McHamb  
336-516-0308 May 2

Helical Pier ab<sup>1/2</sup> 1200 each

## Garage Support

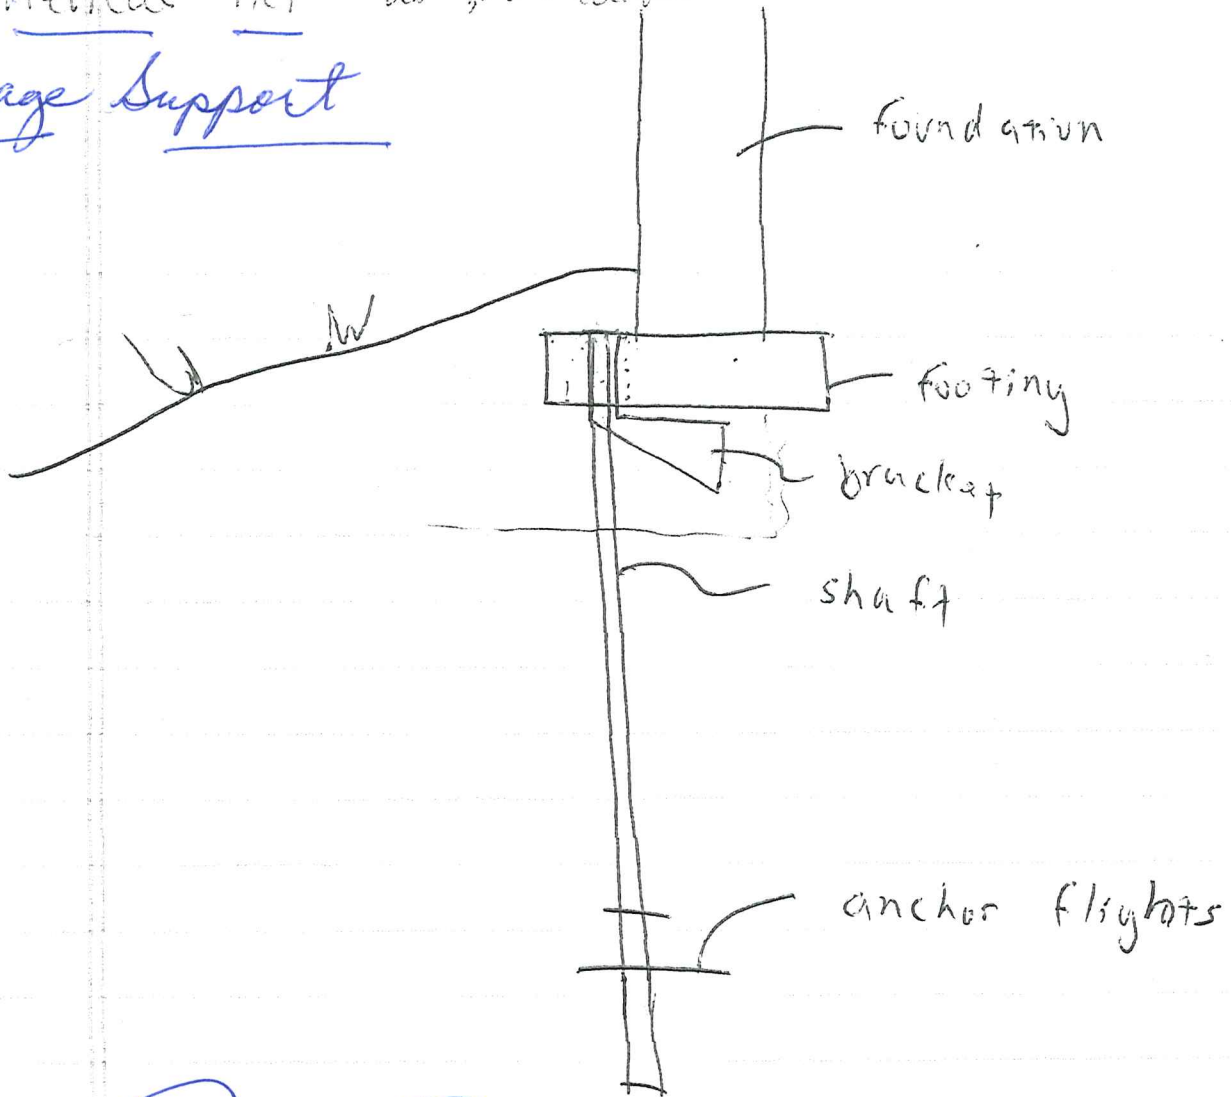

Geo Marley Waterproofing system  
Geomat<sup>mat</sup> plus - drain mat over mat  
1/2 way - gravel  
septic cloth over gravel.

at Garage doors - fill w/gravel - cement  
stain black

17- 20,000 - 25,000 or 28,000  
beams 6-800 ea.