

CMH Manufacturing
West, Inc.
Perris Division • (951) 657-1611

DRAWING FILE INFORMATION

ELECTRICAL SCHEMATIC &
APPROVAL FLOOR PLAN

C & N


PROJ. NO.	1-43
SQ. FT.	2,684
SHEET	1-43

DATE		7-25-07	6
REVISED		-	

1. ROOF DESIGN (LOAD, TO P.S.F. ■■■■■)
2. MAXIMUM ROOF BEAM SPAN 24' BEAM-20'-0" PER
STREET, DIM. 84.00
3. ROOF PITCH 4:8 OR LESS
4. INTERIOR BEARING WALLS PER 88.04 & 98.00
5. 1/2" AT 20 P.S.F., 1/2" AT 30 P.S.F. OR
1/4" REQUIRED AT ALL PASSAGE DOOR
OPENINGS AT LONGITUDINAL CL. WALL
(ALLS. NOTED OTHERWISE)

THERMAL ZONE I		THERMAL ZONE II	
HEAT LOSS R/W NO.	15	MAX. GLAZING	661
HEAT LOSS R/W NO.	-	MAX. GLAZING	-
HEAT LOSS R/W NO.	-	MAX. GLAZING	-

1. ANY ABOVE SYMBOL MAY BE SHOWN DASHED INDICATING IT IS OPT. 2. BRANCH CIRCLES NO. PER CIRC. DMC. 4.3

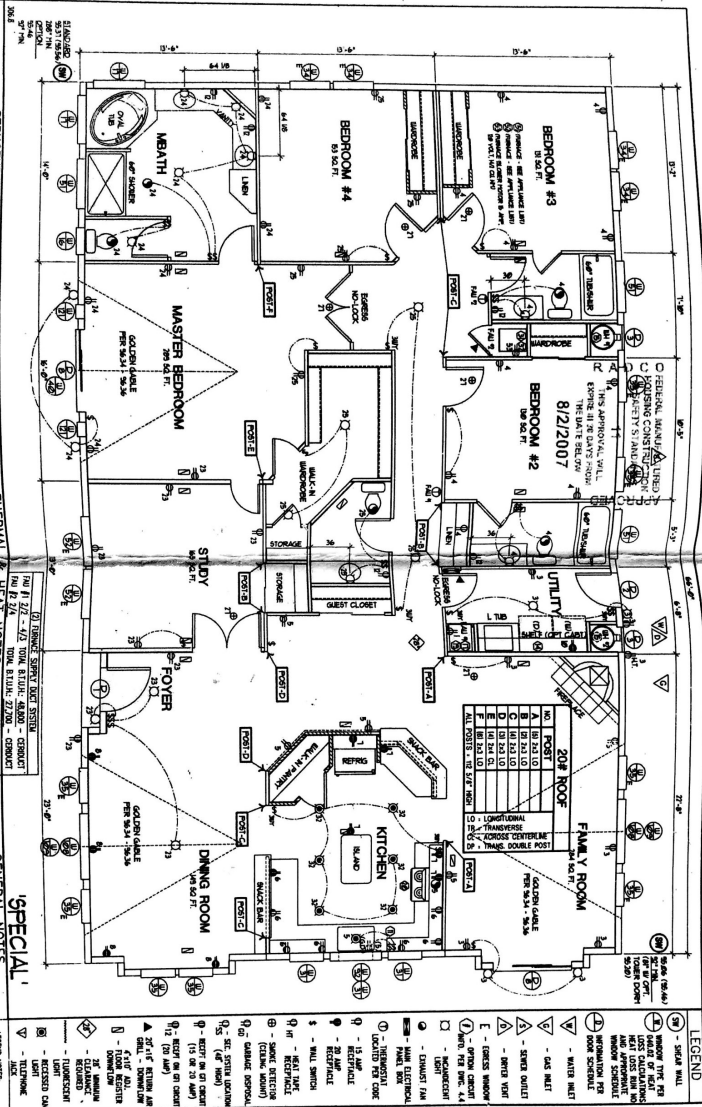

LEGEND