

SITUATED IN

The State of Ohio, County of Noble,
Township of Jackson, and being a part
of the SW Qtr. of Sec. 19, T5, R9.

BASIS OF BEARING

Bearings and distances are based on State Plane Grid Coordinates,
NAD83, Ohio South, per GPS Observation.

REFERENCES


* As Noted on Plat

LEGEND

- ▲ Railroad Spike Found
- △ Railroad Spike Set
- Iron Pin Found
- Pipe Found w/cap
- ⊠ Stone Found
- ⌵ Property Hook
- Iron Pin Set
- Ex. Fence
- ⊗ Axle Found

CURVE TABLE


CURVE	RADIUS	ARC LENGTH	CHORD LENGTH	CHORD BEARING	DELTA ANGLE
C1	108.53'	71.87'	70.57'	S 20°55'27" E	37°56'39"
C2	57.88'	66.29'	62.73'	S 85°02'14" E	65°37'29"
C3	478.32'	193.20'	191.89'	N 74°58'45" E	23°08'32"
C4	732.94'	203.56'	202.91'	S 79°47'05" E	15°54'46"
C5	993.07'	457.20'	453.17'	S 61°31'57" E	26°22'42"
C6	993.07'	457.20'	453.17'	N 61°31'57" W	26°22'42"
C7	732.94'	203.56'	202.91'	N 79°47'05" W	15°54'46"
C8	478.32'	193.20'	191.89'	S 74°58'45" W	23°08'32"
C9	57.88'	66.29'	62.73'	N 85°02'14" W	65°37'29"
C10	108.53'	71.87'	70.57'	N 20°55'27" W	37°56'39"

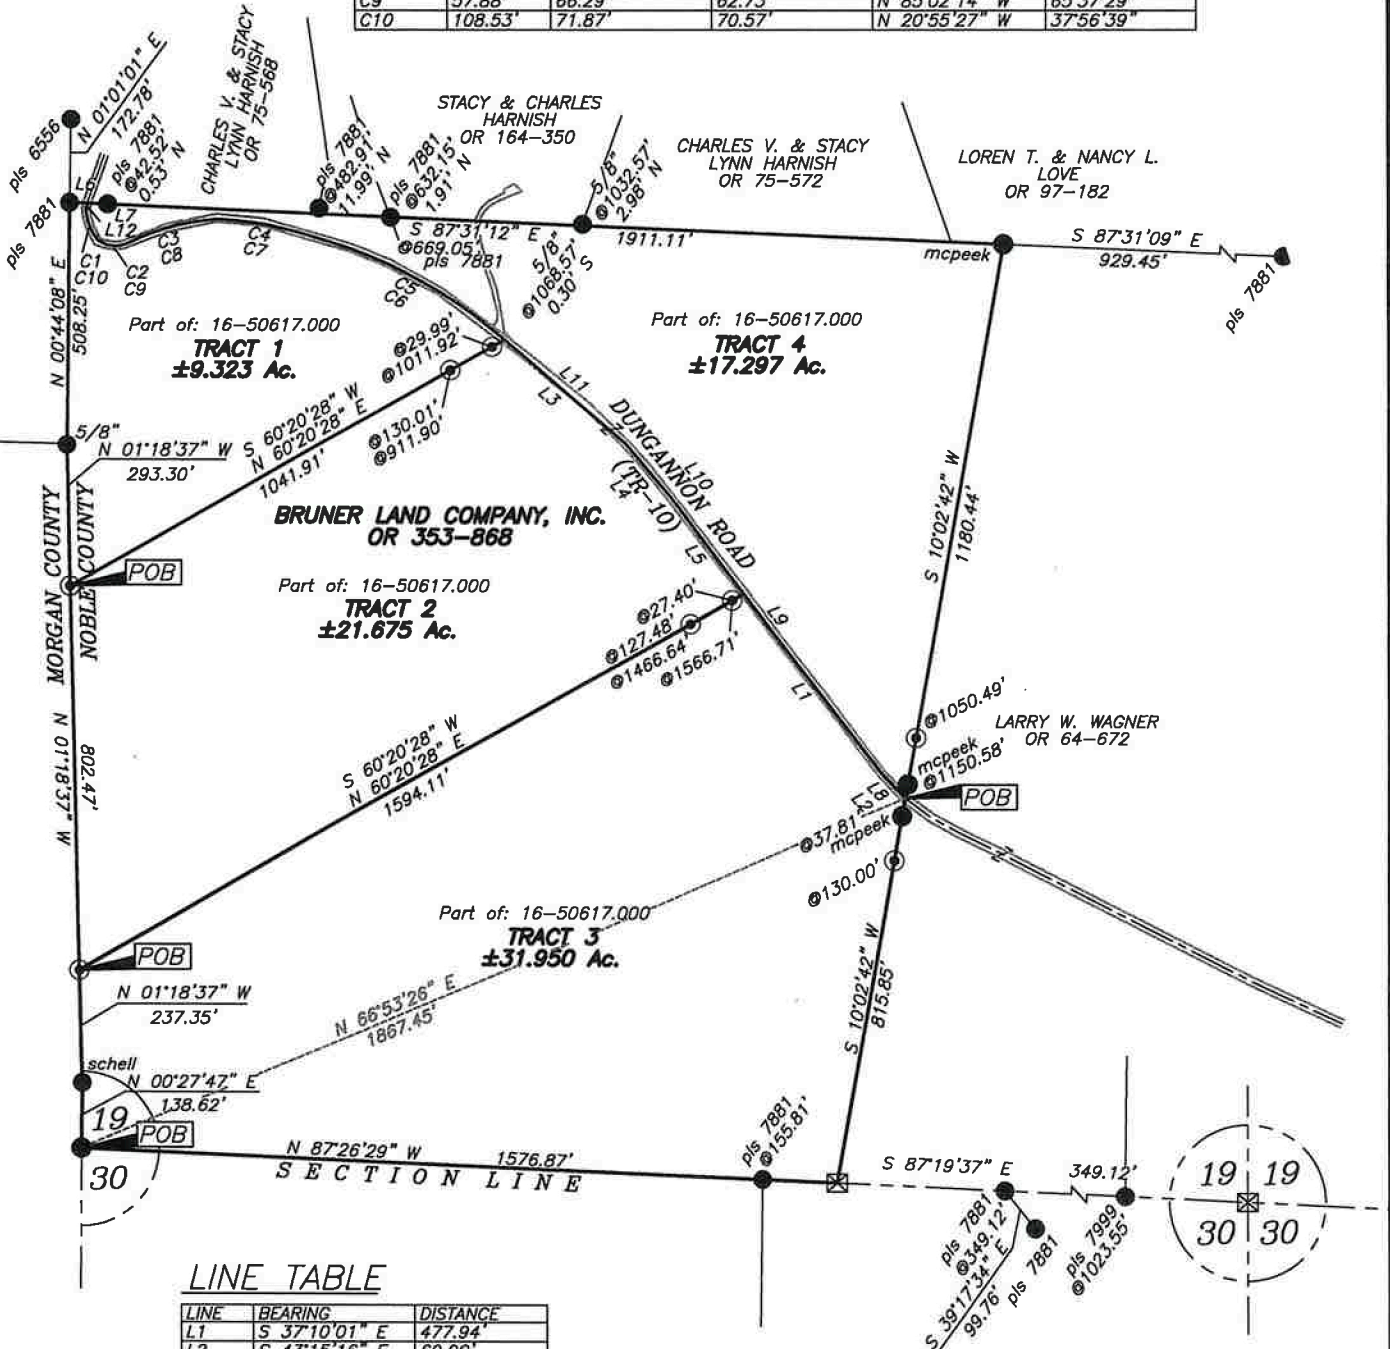

LINE TABLE

LINE	BEARING	DISTANCE
L1	S 37°10'01" E	477.94'
L2	S 43°15'16" E	69.90'
L3	S 49°05'10" E	333.88'
L4	S 40°28'15" E	146.66'
L5	S 37°10'01" E	249.44'
L6	S 87°31'12" E	37.05'
L7	S 13°18'25" W	10.95'
L8	N 43°15'16" W	69.90'
L9	N 37°10'01" W	727.39'
L10	N 40°28'15" W	146.66'
L11	N 49°05'10" W	333.88'
L12	N 13°18'25" E	10.95'

Graphic Scale



(IN FEET)

1 inch = 400 ft.

Brian Kelly McPeck
Reg. Surveyor No. 8517

9/2/21
Date

This plat was prepared by McPeck Land Surveying, LLC,
in accordance with Chapter 4733-37 of the Administrative Code,
and is intended to be used for the legal transfer of the property
described and does not intend to describe all or any easements of
record, nor encroachments unless otherwise intended.



MCPECK LAND SURVEYING LLC
www.mcpeeklandsurveying.com
email: brian@mcpeeklandsurveying.com
340 Robin Hood Ln., Zanesville, Oh 43701 * 740.704.6073